
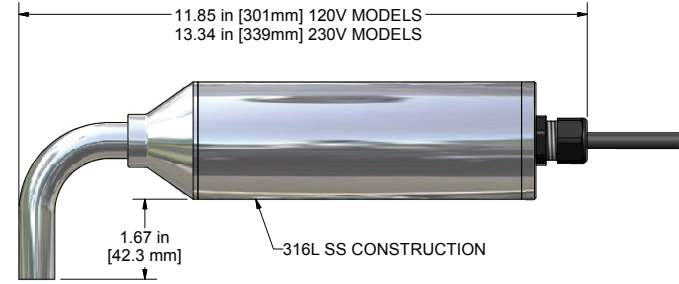
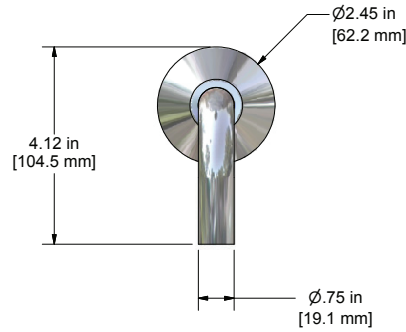





## DIRECT MOUNT 12" FIBER OPTIC BUNDLE MOUNT

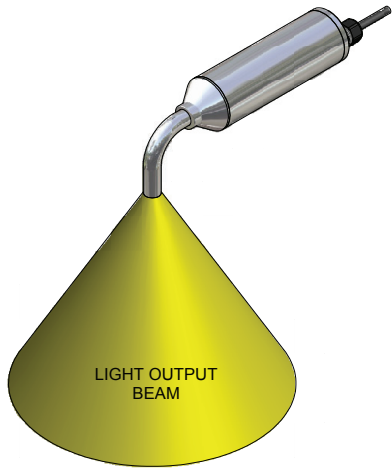

SIDE

MOUNT DIRECT TO SIGHT GLASS USING CANTY OR CUSTOMER SUPPLIED BRACKET. RIGID FIBER OPTIC BUNDLE SUPPORTS LIGHT. SEE DATASHEET TD10811-200 FOR OPTIONAL MOUNTING BRACKET OPTIONS.

## REMOTE MOUNT 24" + LONGER FIBER OPTIC BUNDLE MOUNT

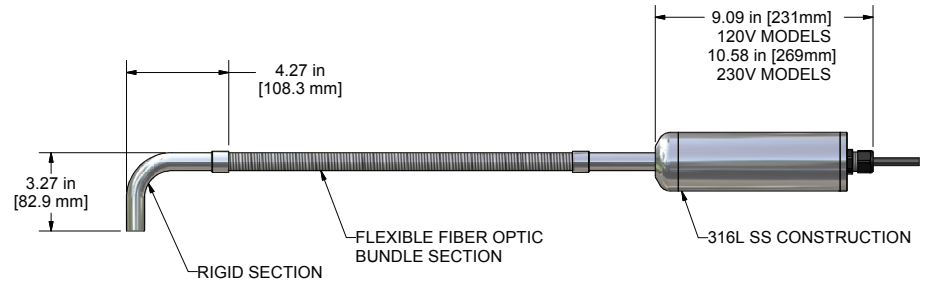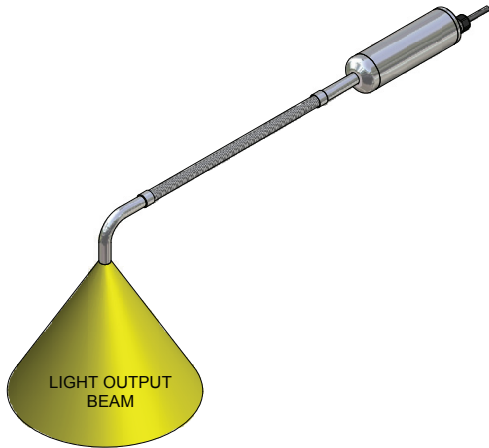

SIDE

MOUNT BUNDLE DIRECT TO SIGHTGLASS. FLEXIBLE FIBER OPTIC BUNDLE ALLOWS LIGHT TO BE MOUNTED REMOTELY. SEE DATASHEET TD10811-200 FOR OPTIONAL MOUNTING BRACKET OPTIONS.

### NOTES:

1. REFERENCE DATASHEET TA9683-1.

**NOTICE**  
THIS DRAWING IS THE PROPERTY OF J.M. CANTY AND MUST BE RETURNED WITHOUT REPRODUCTION OR DUPLICATION, AT ANY TIME UPON REQUEST, BUT IN ANY EVENT AS SOON AS IT HAS SERVED THE PURPOSE FOR WHICH IT WAS FURNISHED, WHILE IN THE POSSESSION OF THE RECIPIENT, IT MUST BE PROPERLY SAFEGUARDED AGAINST DISCLOSURE TO ANYONE EXCEPT THOSE EMPLOYEES WHO REQUIRE IT FOR WORK OR JOB. THE RECIPIENT MUST KEEP CONFIDENTIAL AND REQUIRE HIS (HER) EMPLOYEES TO KEEP CONFIDENTIAL THE INFORMATION CONTAINED HERE ON.

**IMPORTANT**  
FOR THE REQUIRED MANUFACTURING SPECIFICATIONS SEE DOCUMENT #A4955

NOTE: FAILURE TO RECEIVE DOCUMENT DOES NOT WAIVE VENDOR RESPONSIBILITY

DRAWN BY JD	DATE 5/9/2007
APPROVAL JD	DATE 6/11/2007
ENGINEERING ANALYSIS CURRENT	DATE
MFG. APPROVAL PENDING	DATE
QUALITY CONTROL I.O.A.	DATE

J.M. CANTY INC.  
6100 DONNER RD.  
BUFFALO, N.Y. 14094  
U.S.A.

**CANTY**

WWW.JMCANTY.COM

J.M. CANTY INTL. LTD.  
BALLYCOOLIN BUS. PK.  
BLANCHARDSTOWN  
DUBLIN 15, IRELAND

TITLE  
HYL 52 LIGHT SYSTEM, INTEGRAL TRANSFORMER, 120V OR 230V INPUT MODELS, FIBER OPTIC BUNDLE SPECIFICATION

SIZE / REVISION  
C 0

FILE NAME  
TC9683-120

SCALE AS NOTED

SHEET 1 OF 1

SPECIFICATIONS	
MAX. TANK SIZE	8' [2.4m] Ø X 12' [3.7m] DP.
BULB	50W HALOGEN. IDEAL WHITE LIGHT 3500°K
INPUT VOLTAGE	120V OR 230V AC 50/60 Hz MODELS AVAILABLE
TIMER	NOT REQ'D. MOMENTARY SERVICE ONLY
MOMENTARY SWITCH	AVAILABLE INTEGRAL OR EXTERNAL W/42" CORD
INFRA-RED FILTER	YES - REMOVES ALL HEAT. NO PRODUCT BAKE-ON
ENVIRONMENTAL RATINGS	NEMA 4X, IP66